

In the additional menu it is possible to change charging, disconnecting and reconnecting values.


The menu can be opened up to 5min after connecting batteries. Here you can see how it works.




Standard display



If you press the left key for 3s standard menu will be opened. You can see the operating mode.

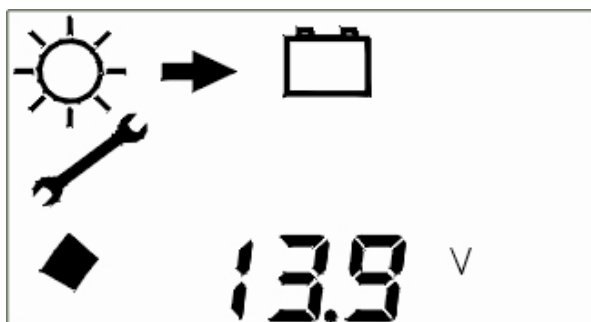


If you press both keys for 3s the charging menu will be opened. The first bar on the left side shows the value for float-charging. With the right key you can select it and with the left key you can change it.

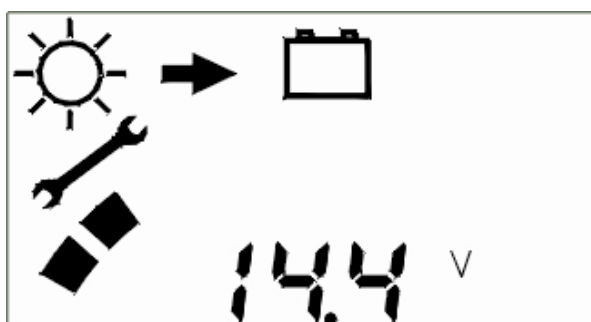

After pressing the left key again the second bar and the value for boost-charging will appear. With the right key you can select it and with the left key you can change it.



After pressing the left key again the third bar and the value for equal-charging will appear. With the right key you can select it and with the left key you can change it.

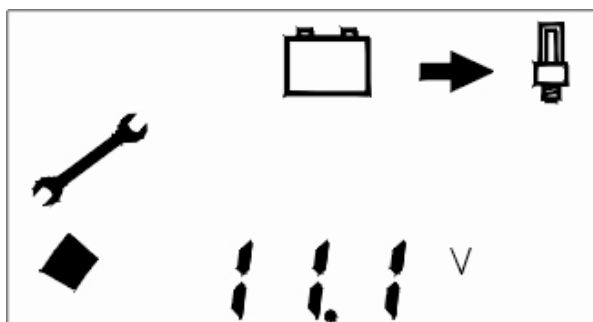

After pressing the left key again the disconnecting value of the discharge protection will appear. With the right key you can select it and with the left key you can change it.



After pressing the left key again the reconnecting value of the discharge protection will appear. With the right key you can select it and with the left key you can change it.

You can leave the menu with pressing the left key for 3s.