

G100 Declaration of conformance

Typetest details

Inverter


Type	GW5048-EM, GW3648-EM, GW3048-EM
Manufacturer	Jiangsu GoodWe Power Supply Technology Co.,Ltd
Address	NO.189 Kun Lun Shan Road, Suzhou New District, Jiangsu, China

EzMeter


Type	ACR10R-D16TE
Manufacturer	Jiangsu Acrel Electric MFG. Co.,Ltd.
Address	No.5 Dongmeng Road, Jiangyin City, Jiangsu Province, China

Test Address	NO.189 Kun Lun Shan Road, Suzhou New District, Jiangsu, China		
Tel	+86 512 6239 7998		
E-mail address	service@goodwe.com.cn		
Date	2017-03-20		
Signature	谢静	On behalf of	

System Connection Diagram

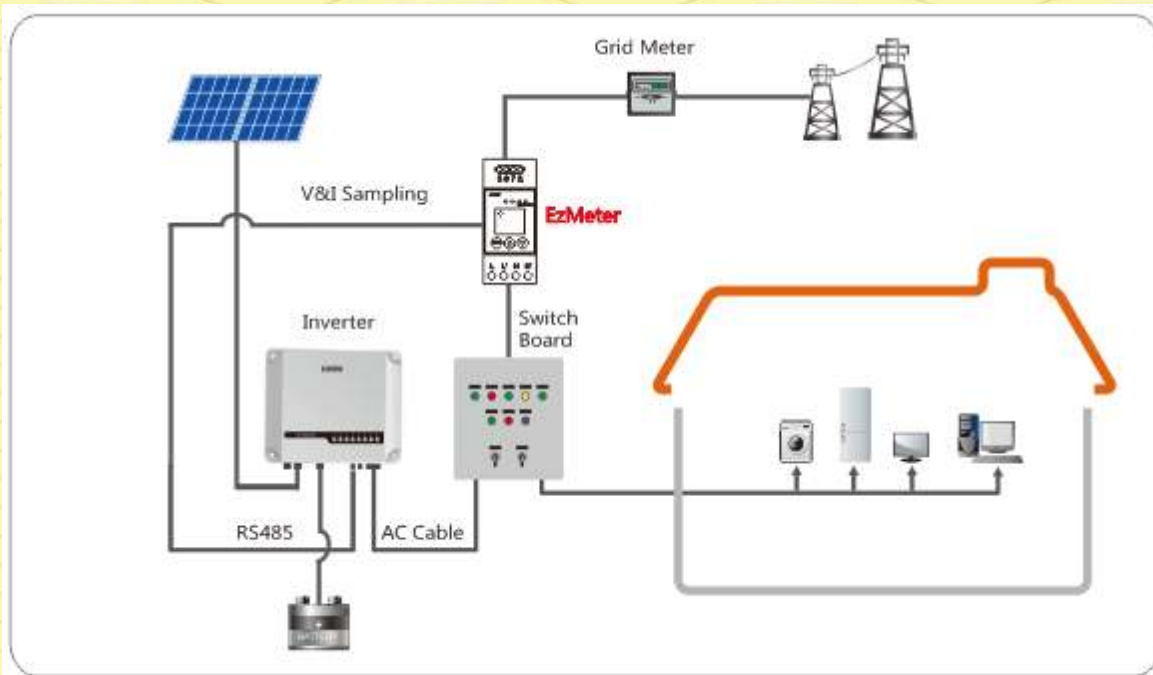

TestDiagram

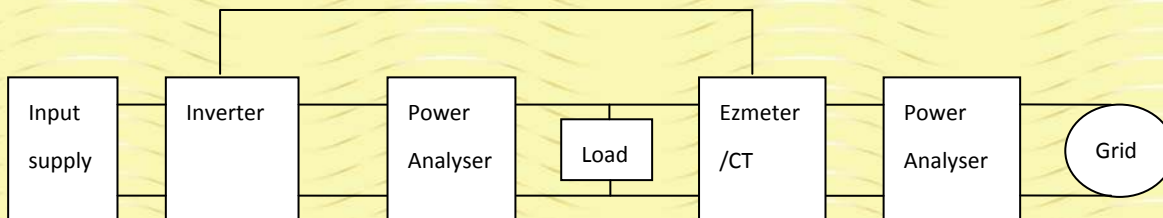

Power limiting setting: adjustable, decided by DNO.

	Non Export
Reverse Power Limit test set point	2% / 25% / 50% / 75% of inverter rating
Declared accuracy	2% (set value= Agreed value-2%)
Definite time delay (fall time)	5 s (detect an excursion and reduce the export to the Agreed Export Capacity)
Response time	1 s (sense an excursion and signal to the generation to reduce output)

Type testing data

1. Setting protection test:

Requirement	Result	Note
The settings is password protected, and cannot be changed by anyone other than getting written agreement of the DNO;	Pass	

2. Fail-safe test:

Method: Set 50% export limit, implement the test before start or in running.

Criteria: response time is less than 1s, fall time is less than 5s, the inverter's output active power is less than set limit. After fail safe test, disconnect AC, the reconnect time delay is more than 10min.

No.	Component	Test	Active Power	Response Time	Fall Time	reconnect time	Pass/Fail
1	Power Monitoring Unit (PMU)	Remove power supply to Meter	1930W	<1s	3S	10min48s	pass
2	Power Monitoring Unit (PMU)	Remove CT	1940W	<1s	4.2S	10min48s	pass
3	Control Unit (CU)	Remove power supply to any CU	NA	NA	NA	NA	NA
4	Generator Interface units (GIU)	Remove power supply to all GIUs	NA	NA	NA	NA	NA
5	Demand Control Unit (DCU)	Remove power supply to all DCUs	NA	NA	NA	NA	NA
6	Network hub / switches	Remove power supply	NA	NA	NA	NA	NA
7	PMU → CU communication cable	Unplug cable	1970W	0.3s	1.1s	10min48s	Pass
8	CU → GIU	Unplug cable (repeat where	NA	NA	NA	NA	NA

	communication cable	additional GIU units)					
9	GIU → Generator communication cable	Unplug cable (repeat where additional GIU units)	NA	NA	NA	NA	NA
10	CU → DCU communication cable	Unplug cable (repeat where additional DCU units)	NA	NA	NA	NA	NA
11	DCU → load communication cable	Unplug cable (repeat where additional DCU units)	NA	NA	NA	NA	NA

3. Power Limit check

Method: Set export limit, implement the test before start, than start the inverter.

Criteria: response time is less than 1s, fall time is less than 5s, export power $\pm 2\%$ Pn .

2%export Agreedlimit

Input Load Pass/ Fail		Input supply [% Inverter Rating]			
		25%	50%	75%	100%
Load [% Inverter Rating]	0%	pass/3.8S	pass/4.9S	Pass/2.5s	pass/2.9S
	25%	pass/3s	Pass/3.5s	Pass/2.7s	Pass/1.9s
	50%	NA	Pass/3.8s	pass/4.8S	Pass/1.6s
	75%	NA	NA	Pass/2.5s	pass/2.6s
	100%	NA	NA	NA	pass/3.6s

25%export Agreedlimit

Input Load Pass/ Fail		Input supply [% Inverter Rating]			
		25%	50%	75%	100%
Load [% Inverter Rating]	0%	Pass/3s	Pass/3.5s	Pass/3.9s	Pass/2.2s
	25%	NA	pass/3.9S	pass/4.3S	Pass/2s
	50%	NA	NA	pass/0.3S	pass/2.5S
	75%	NA	NA	NA	Pass/2s
	100%	NA	NA	NA	NA

50%exportAgreed limit

Input Load Pass/ Fail		Input supply [% Inverter Rating]			
		25%	50%	75%	100%
Load [% Inverter Rating]	0%	NA	Pass/0.4s	Pass/1.5s	Pass/2.4s
	25%	NA	NA	pass/2.8S	Pass/1.9s
	50%	NA	NA	NA	Pass/0.5s
	75%	NA	NA	NA	NA
	100%	NA	NA	NA	NA

75%exportAgreed limit

Input Load Pass/ Fail		Input supply [% Inverter Rating]			
		25%	50%	75%	100%
Load [% Inverter Rating]	0%	NA	NA	pass/3.9S	pass/4.1S
	25%	NA	NA	NA	pass/2S
	50%	NA	NA	NA	NA
	75%	NA	NA	NA	NA
	100%	NA	NA	NA	NA

4. decreasing Load test

Input supply: 100% of the inverter rating

The load shall be decreased from the initial load to the final load as shown in followed Table. The export control function shall manage the input supply such that the exportpower is below the export limit setting within the relevant timeframe for all stepdecreases in load shown in Table.

Criteria: response time is less than 1s, fall time is less than 5s, export power $\pm 2\%$ Pn .

2%export Agreedlimit

Initial Load Final Load export/ time		Initial Load [% Inverter Rating]			
		100%	75%	50%	25%
Final Load	75%	Pass/3s	NA	NA	NA

[% Inverter Rating]	50%	Pass/3.4s	Pass/2s	NA	NA
	25%	Pass/4.2s	Pass/4.3s	Pass/2s	NA
	0%	pass/2.7S	pass/1.8S	pass/2.4S	pass/2.5S

25%export Agreedlimit

Initial Load Final Load export/ time		Initial Load [% Inverter Rating]			
		100%	75%	50%	25%
Final Load	75%	pass/4.6S	NA	NA	NA
	50%	pass/2.6s	Pass/2.6s	NA	NA
[% Inverter Rating]	25%	pass/4.4S	Pass/2.1s	pass/2.4S	NA
	0%	Pass/2s	Pass/2.2s	0pass/3.2S	pass/2.5S

50% export Agreedlimit

Initial Load Final Load export/ time		Initial Load [% Inverter Rating]			
		100%	75%	50%	25%
Final Load	75%	NA	NA	NA	NA
	50%	Pass/3s	Pass/2s	NA	NA
[% Inverter Rating]	25%	pass/3S	pass/2.8S	pass/4S	NA
	0%	Pass/2.1s	pass/2.8S	pass/4.3S	pass/3S

75%export Agreedlimit

Initial Load Final Load export/ time		Initial Load [% Inverter Rating]			
		100%	75%	50%	25%
Final Load	75%	NA	NA	NA	NA
	50%	NA	NA	NA	NA
[% Inverter Rating]	25%	pass/1.5s	pass/0.5s	pass/2s	NA
	0%	pass/2.8s	pass/2.6s	pass/3s	pass/3.9s

5. Adding input supply test

At given load, the input shall be added from the initial input supply to the final as shown in followed Table. The export power will be below the export limit setting within the relevant timeframe for all steps.

Criteria: response time is less than 1s, fall time is less than 5s, export power $\pm 2\% P_n$.

2% export Agreed limit

Input Load / export/ time		Final input supply [% Inverter Rating]			
		25%	50%	75%	100%
Load/	0%	Pass/3.1s	pass/4.3S	pass/4.2S	pass/4.2S
	25%	NA	pass/2S	pass/1S	pass/0.6S
Initial input supply	50%	NA	NA	pass/1.1S	pass/2.6S
	75%	NA	NA	NA	pass/1.6S
[% Inverter Rating]					

25% export Agreed limit

Input Load / export/ time		Final input supply [% Inverter Rating]			
		25%	50%	75%	100%
Load/	0%	Pass/0.5s	Pass/4s	Pass/2.4s	Pass/2.2s
	25%	NA	pass/1.1S	pass/1.7S	pass/3.2S
Initial input supply	50%	NA	NA	pass/1.2S	pass/4.8S
	75%	NA	NA	NA	Pass/2s
[% Inverter Rating]					

50% export Agreed limit

Input Load / export/ time		Final input supply [% Inverter Rating]			
		25%	50%	75%	100%
Load/	0%	NA	Pass/2s	pass/4.3S	Pass/3.2s
	25%	NA	NA	Pass/0.5s	pass/4S
Initial input supply	50%	NA	NA	NA	Pass/1.2s
	75%	NA	NA	NA	NA
[% Inverter Rating]					

75% export Agreedlimit

Load	Input export/ time	Final input supply [% Inverter Rating]			
		25%	50%	75%	100%
Initialinput supply [%Inverter Rating]	0%	NA	NA	Pass/2.7s	pass/4.2s
	25%	NA	NA	NA	pass/2.5s
	50%	NA	NA	NA	NA
	75%	NA	NA	NA	NA

Comments

Test data is tested inGW5048D-EMcooperated with EzMeter ACR10R-D16TE. GW3648D-EM / GW3048S-EMis similar to GW5048D-EM in circuit and construction except for output rating of current and power. The test date can refer to GW5048D-EM .