

**EEEEASILY
MORE.**

Excellent. Efficient. Expert.

The Value-Added Modules of the IBC SOLAR Line.
IBC MonoSol 305 VL5, 310 VL5, 315 VL5
First-class solar modules made of monocrystalline silicon (PERC cell concept)



25 year power and 10 year product warranty¹



Positive power tolerance (-0/+5 Wp)



Increased mechanical stability (5400 Pa)²



German warrantor



100% tested quality



Maximum transparent ARC glass

IBC SOLAR – your partner for energy solutions

IBC SOLAR AG has had a successful presence in the photovoltaic market for **more than 35 years** and is one of the leading international energy companies providing high-performance system solutions in every size and for every application with intelligent photovoltaic systems. The **economic strength and financial independence** is confirmed by globally recognised rating agencies.

Smart Systems for Solar Power thanks to perfectly matched components. **More than 1,000 highly qualified partners** around the world, as well as **more than 3,000 megawatts of installed power**, which supply **around 2 million people with solar power**, underline the high level of expertise of IBC SOLAR.

IBC SOLAR – leading PV system integrator from Germany since 1982!



OHSAS 18001:2007
ISO 9001:2008
ISO 14001:2004
www.tuv.com
ID: 9105069440



IEC 61215
IEC 61730
www.tuv.com
ID: 0000042521



Engineered in GERMANY

The ideal solution for:



TECHNICAL DATA


IBC MonoSol	305 VL5	310 VL5	315 VL5
Article number	2004200014	2004200015	2004200016

Electrical data (STC):			
STC Power Pmax (Wp)	305	310	315
STC Nominal Voltage Umpp (V)	32.6	33.0	33.1
STC Nominal Current Impp (A)	9.36	9.41	9.53
STC Open Circuit Voltage Uoc (V)	40.2	40.4	40.5
STC Short Circuit Current Isc (A)	9.87	10.01	10.02
Module Efficiency (%)	18.7	19.1	19.4
Power Tolerance (Wp)	-0/+5	-0/+5	-0/+5

Electrical data (NOCT):			
800 W/m ² NOCT AM 1.5 Power Pmax (Wp)	224.1	227.8	231.4
800 W/m ² NOCT AM 1.5 Nominal Voltage Umpp (V)	29.66	29.86	29.95
800 W/m ² NOCT AM 1.5 Open Circuit Voltage Uoc (V)	36.23	36.47	36.56
800 W/m ² NOCT AM 1.5 Short Circuit Current Isc (A)	7.97	8.02	8.03
Relative Efficiency Reduction at 200 W/m ² (%)	3.5	3.5	3.5

Temperature coefficient:			
NOCT (°C)	44	44	44
Tempcoeff Isc (%/°C)	+0.06	+0.06	+0.06
Tempcoeff Voc (mV/°C)	-112.56	-113.12	-113.40
Tempcoeff Pmpp (%/°C)	-0.38	-0.38	-0.38

25 year linear power warranty by IBC SOLAR

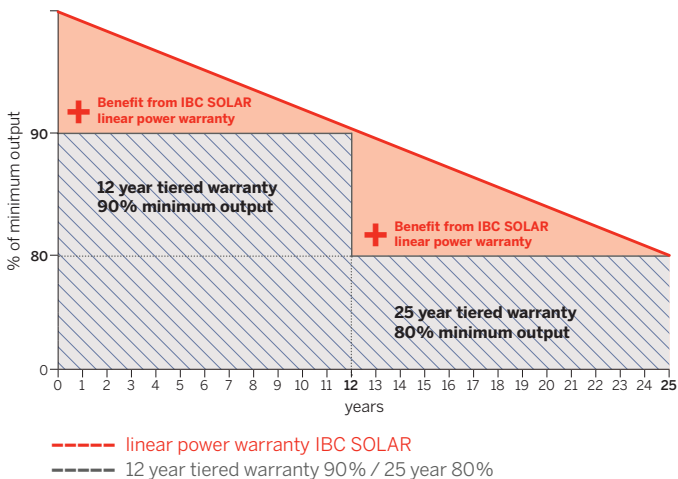

¹⁾ The warranty presupposes installation in accordance with the valid installation instructions.
 Standard test conditions: 1000 W/m² irradiation with a spectral distribution of AM 1.5 and a cell temperature of 25 °C. 800 W/m², NOCT. Information according to EN 60904-3 (STC).
 All values according to DIN EN 50380. The precise conditions and content can be taken from the respectively valid version of the product and power warranty, which you obtain from your IBC Premium Partner. Subject to errors and modifications.


²⁾ Tested according to IEC 61215 for snow loads up to 5400Pa (5.4 kN/m²).

Operating conditions:	
Max. System Voltage (V)	1000
Application Class	A
Reverse Current Ir (A)	20
Current value string fuse (A)	15
Fuse protection from parallel strings	3

Mechanical properties:	
Dimensions (L x W x H in mm)	1640 x 992 x 40
Weight (kg)	18.5
Load capacity (Pa) ²	5400
Front sheet (mm)	3.2 (low-iron photovoltaic glass and anti-reflective coating)
Frame	anodized aluminium, sturdy hollow-chamber frame
Cells	6 x 10 monocrystalline silicon cells
Connection type	MC4 (IP65)

Warranties and certification:	
Product warranty	10 years ¹
Power warranty	25 years, linear
Certification	IEC 61215, IEC 61730-1/-2, ISO 9001, ISO 14001, OHSAS 18001

Packaging information:	
Number of modules per pallet	26
Number of pallets per 40' container	28
Number of pallets per lorry	30
Dimensions incl. pallet (L x W x H in mm)	1680 x 1135 x 1145
Gross weight incl. pallet (kg)	520
Stackability per pallet	3-fold

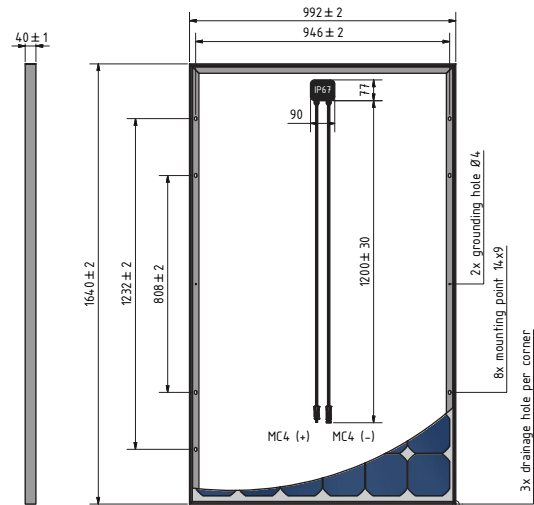

Presented by: