

THE NEXT EVOLUTION LEAP

LG NeON[®] 2BiFacial

BIFACIAL MODULE

**TRANSPARENT
BACKSHEET**



LG NeON[®] 2BiFacial

LG NeON[®] 2 BiFacial – UNLEASH THE POWER!


The LG NeON[®] 2 BiFacial is based on the well-known high-performance module LG NeON[®] 2. Already on the front side, the LG340N1T-V5 module reaches with its 60 highly efficient, mono-crystalline cells a basic power of 340 Watt peak (Wp). Through the use of bi-facial cells and a transparent back sheet, the power of the LG NeON[®] 2 solar modules with CELLO technology can now be fully exploited. Thanks to the additional yield from the back side of the module (“bifacial bonus”) the overall performance of the LG NeON[®] 2 BiFacial module increases under optimal conditions.

LOCAL GUARANTOR, GLOBAL SECURITY

LG Solar is part of LG Electronics, a global and financially strong company, with over 50 years of experience.

Good to know: LG Electronics is the warrantor for your solar modules. LG Electronics has been present in Europe with many local subsidiaries for decades.


The Warrantor's 2017 Global Sales in Billions of US Dollars

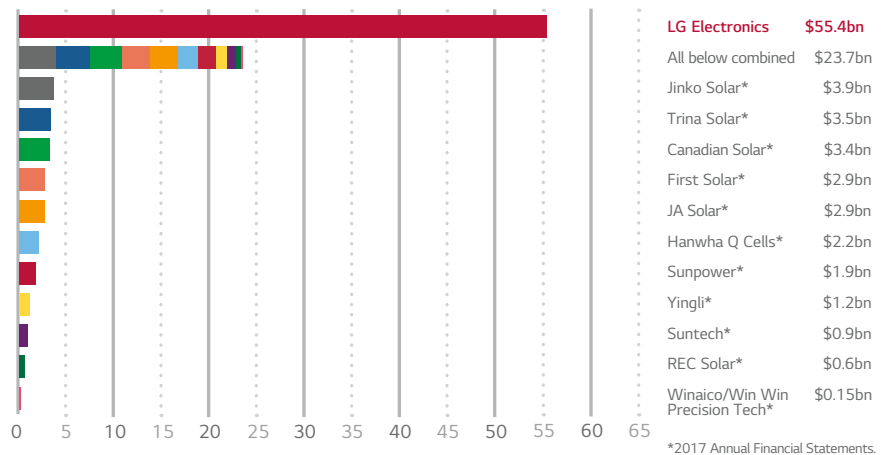


LG NeON[®] 2 BiFacial – BONUS!

Traditional, single-sided active cells and modules can absorb incident light only on the front side and convert it to electricity. The LG NeON[®] 2 BiFacial, however, has double-sided active cells and a translucent foil on the back. This enables to use both the light falling on the front side and on the back side, and increase energy yield under optimal conditions by up to 30 % compared to a monofacial module of equal nominal power.

Bifacial module

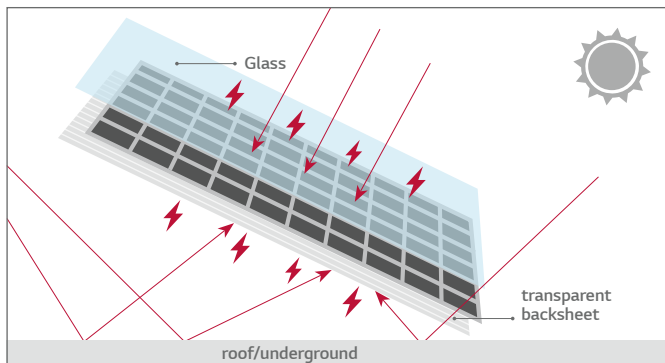

Monofacial module

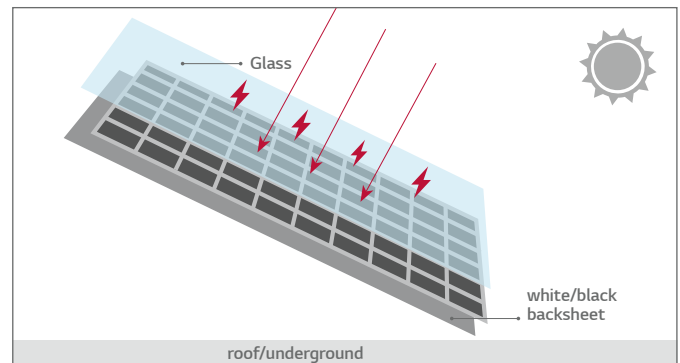

HIGHER YIELD WITH 25-YEARS OF LG PRODUCT AND PERFORMANCE GUARANTEE

Extended Product Warranty

25 yrs

Linear Warranty: 25yrs*




* Under BiFi100 conditions, 1st year: 104.4%, after 1st year: 0.35 annual degradation, 95.4% for 25 years ** Based on STC max power

LG NeON[®] 2 BiFacial

LG340N1T-V5 | LG335N1T-V5

60 cell

LG NeON[®] 2 BiFacial is designed to utilize both sides of the PV module for absorbing more light and generating more energy. It also adopts the prizewinning Cello technology which replaces 4 busbars with 12 thin wires to enhance power output and reliability. It is possible to produce a surplus of output energy with LG NeON[®] 2 BiFacial compared with normal monofacial modules.

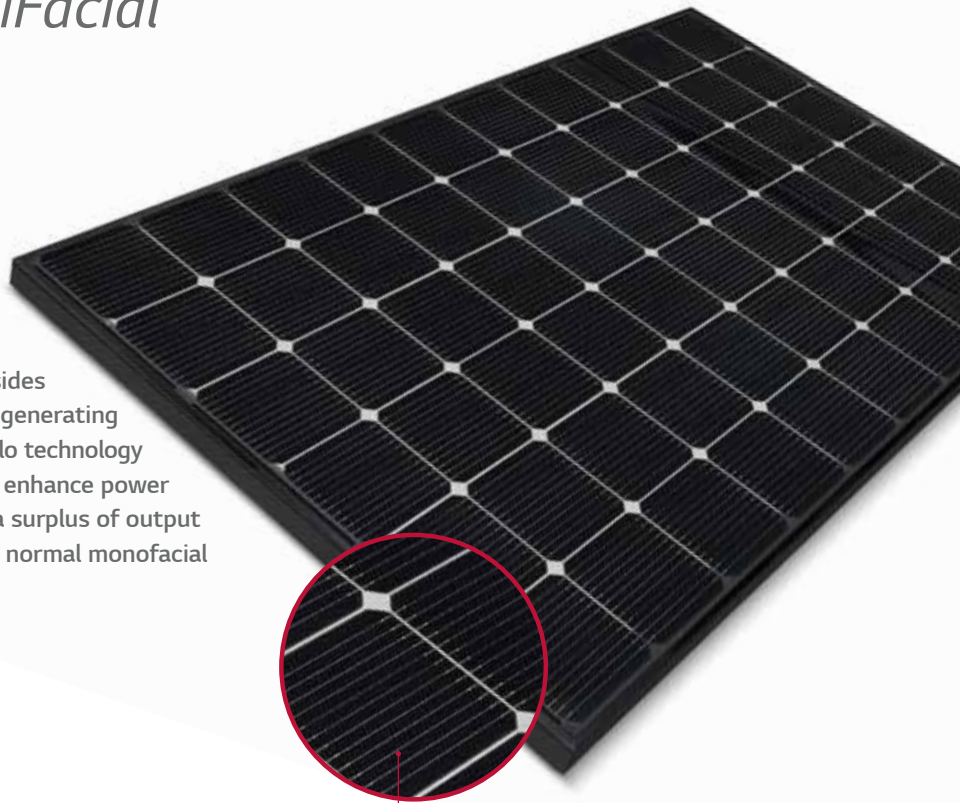

– CELLO technology
– transparent backsheet

KEY FEATURES



25-year product warranty

In addition to the extended performance warranty, LG has also extended the product warranty for LG NeON[®] 2 BiFacial modules to a strong 25 years.



Better Performance on a Sunny Day

LG NeON[®] 2 BiFacial now performs better than many other modules on sunny days thanks to its improved temperature coefficient.



High Power Output

LG NeON[®] 2 BiFacial has been designed using LG's new CELLO technology. The cell efficiency on the rear side is only slightly lower than on the front side.



Bifacial Energy Yield

It is possible to produce 30 % more energy than with conventional modules under optimal conditions.



More Power also on a Cloudy Day

LG NeON[®] 2 BiFacial gives good performance even on a cloudy day due to its very good weak sunlight performance.



Almost Zero LID (Light Induced Degradation)

The n-type cells used in LG NeON[®] 2 BiFacial have almost no boron, which often causes the initial efficiency drop, of conventional modules.

About LG Electronics

LG Electronics is a global big player, committed to expanding its operations with the solar market. The company first embarked on a solar energy source research program in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX[®] series to the market, which is now available in 32 countries. The LG NeON[®] (previous: MonoX[®] NeON), NeON[®]2, NeON[®]2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG Solar's lead, innovation and commitment to the industry.

Mechanical Properties

| | |
|------------------------|----------------------------------|
| Cells | 6 x 10 |
| Cell Type | Monocrystalline / N-type |
| Cell Dimensions | 161.7 x 161.7 mm |
| Number of Busbar | 12 (Multi Wire Busbar) |
| Dimensions (L x W x H) | 1,686 x 1,016 x 40 mm |
| Front Load* | 6,000 Pa |
| Rear Load* | 5,400 Pa |
| Weight | 17.1 kg |
| Connector Type | MC4 / MC |
| Junction Box | IP68 with 3 Bypass Diodes |
| Cables | 2 x 1000 mm |
| Glass | High Transmission Tempered Glass |
| Frame | Anodized Aluminium |

*Declaration according to IEC 61215 : 2005 (Preliminary)
 Mechanical Test Loads 5400 Pa / 4000 Pa based on IEC61215-2 : 2016
 (Test Load = Design Load x Safety Factor (1.5))

Certifications and Warranty

| | | |
|-------------------------|--|-------------------------------|
| Certifications | IEC 61215-1/-1-1 / 2:20161), IEC 61730-1/2:20161), IEC 61701:2012 Severity 6* (Salt mist corrosion test) IEC 62716:2013* (Ammonia corrosion test) | |
| | ISO 9001, ISO 14001, ISO 50001 | |
| | Fire Resistance Class | Class C, Fire Class 1 (Italy) |
| | Product Warranty | 25 Years |
| Output Warranty of Pmax | Linear Warranty [†] | |

* Under Bif100 conditions, 1st year : 104.4%, after 1st year : 0.35 annual degradation, 95.4% for 25 years


Temperature Characteristics

| | | |
|------|--------|--------|
| NMOT | [°C] | 42 ± 3 |
| Pmax | [%/°C] | -0.36 |
| Voc | [%/°C] | -0.27 |
| Isc | [%/°C] | 0.03 |

Packaging Configuration

| | | |
|---|------|-----------------------|
| Number of Modules Per Pallet | [EA] | 25 |
| Number of Modules Per 40ft HQ Container | [EA] | 650 |
| Packaging Box Dimensions (L x W x H) | [mm] | 1.750 x 1.120 x 1.221 |
| Packaging Box Gross Weight | [kg] | 464 |

Characteristic Curves

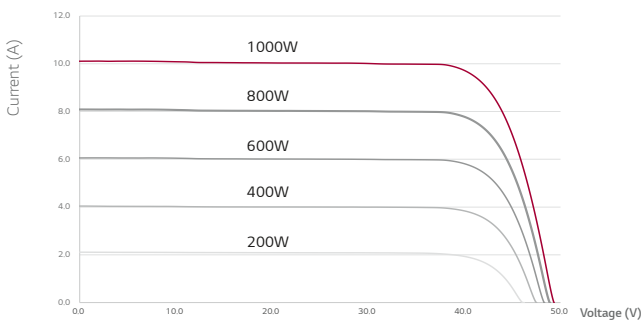

Electrical Properties (STC³)

| Model | LG340N1T-V5 | | | LG335N1T-V5 | | | |
|------------------------------|-------------|---------------------|---------------------|------------------|---------------------|---------------------|-------|
| | STC | Bif100 [†] | Bif200 [†] | STC [*] | Bif100 [†] | Bif200 [†] | |
| Maximum Power (Pmax) | [W] | 340 | 360 | 380 | 335 | 355 | 375 |
| MPP Voltage (Vmpp) | [V] | 34.4 | 34.4 | 34.4 | 34.1 | 34.1 | 34.1 |
| MPP Current (Impp) | [A] | 9.89 | 10.47 | 11.05 | 9.83 | 10.41 | 11.00 |
| Open Circuit Voltage (Voc) | [V] | 40.8 | 40.8 | 40.8 | 40.7 | 40.7 | 40.7 |
| Short Circuit Current (Isc) | [A] | 10.38 | 10.98 | 11.59 | 10.34 | 10.95 | 11.57 |
| Module Efficiency | [%] | 19.8 | 21.0 | 22.2 | 19.6 | 20.7 | 21.9 |
| Operating Temperature | [°C] | -40 ~ +90 | | | | | |
| Maximum System Voltage | [V] | 1.000 | | | | | |
| Maximum Series Fuse Rating | [A] | 20 | | | | | |
| Pmax Bifaciality Coefficient | [%] | 70 ± 5 | | | | | |
| Power Tolerance | [%] | 0 ~ +3 | | | | | |

^{*}STC (Standard Test Condition): Irradiance 1,000 W/m², Module Temperature 25 °C, AM 1.5.
[†]The electrical properties of Bif100 and Bif200 measure under the front side irradiance 1000W/m² + (100W/m² or 200W/m²) * BiFi Use 100W/m² for Bif100 and 200W/m² for Bif200

Electrical Properties (NMOT⁴)

| Model | LG340N1T-V5 | | | LG335N1T-V5 | | | |
|-----------------------------|-------------|---------------------|---------------------|------------------|---------------------|---------------------|------|
| | STC | Bif100 [†] | Bif200 [†] | STC [*] | Bif100 [†] | Bif200 [†] | |
| Maximum Power (Pmax) | [W] | 255 | 270 | 285 | 251 | 266 | 281 |
| MPP Voltage (Vmpp) | [V] | 32.3 | 32.3 | 32.3 | 32.0 | 32.0 | 32.0 |
| MPP Current (Impp) | [A] | 7.89 | 8.35 | 8.81 | 7.84 | 8.31 | 8.78 |
| Open Circuit Voltage (Voc) | [V] | 38.3 | 38.3 | 38.3 | 38.2 | 38.2 | 38.2 |
| Short Circuit Current (Isc) | [A] | 8.34 | 8.82 | 9.31 | 8.31 | 8.80 | 9.29 |

⁴ NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s

Dimensions (mm)

